

# Optimized Resolution of Systems of Equations

Eduardo Xamena<sup>1,2,3,5</sup>, Ana G. Maguitman<sup>3,4</sup>, and Nélide B. Brignole<sup>1,2</sup>

<sup>1</sup>Planta Piloto de Ingeniería Química (UNS-CONICET) - Cno la Carrindanga km 7, Bahía Blanca, Argentina.

<sup>2</sup>LIDeCC - Laboratorio de Investigación y Desarrollo en Comp. Científica.

<sup>3</sup>Knowledge Management and Information Retrieval Research Group.

<sup>4</sup>LIDIA - Laboratorio de Investigación y Desarrollo en Inteligencia Artificial. Departamento de Ciencias e Ing. de la Computación - Universidad Nacional del Sur, Av. Alem 1253, Bahía Blanca, Argentina.

<sup>5</sup>Facultad de Ciencias Exactas - UNSa - Universidad Nacional de Salta, Av. Bolivia 5150, Salta, Argentina.  
`{ex,nbb,agm}@cs.uns.edu.ar`

**Abstract.** Sparse systems of equations are an essential part of real models, being decisive in simulation or optimization. By increasing the problems size or going closer to reality, these systems increase in complexity and size. There are several proven methods to solve them efficiently, and it is known that a structural reorganization can enhance efficiency. We propose an improvement to the Extended Direct Method algorithm as a preprocessor of the adjacency matrix associated with the system. This method was originated in the Design of Chemical Plant Instrumentation, expanding the functions of its predecessor, the Direct Method, which did not take into account the degree of nonlinearity of model equations and variables.

**Keywords:** Systems of equations, Nonlinearity, Partitioning, Simulation, Optimization.

## 1 Introduction

In various disciplines of science we often find large sparse systems of equations, with different degrees of complexity [3, 4, 2, 12]. These may be linear systems, which are evaluated by known methods of resolution, such as those implemented in [6, 10], or systems of equations with varying degrees of nonlinearity. The latter can be computationally very expensive to be solved due to the presence of nonlinear equations more or less complex [1, 13]. One way of optimizing this process may be the structural reorganization of the system. This reorganization can reduce dramatically the number of computational steps to solve such systems.

The Direct Method (DM) [9] and the Extended Direct Method (EDM) [5] are tools emerged in the field of Instrumentation Design of Chemical Plants, which perform the observability analysis of variables involved in the equations system of the model that describes the corresponding plant. DM performs a structural

rearrangement of the adjacency matrix associated with the aforementioned system of equations, thus creating a partition that can be solved in stages and more efficiently. Following the same idea, the EDM does this partitioning considering the degree of nonlinearity of the equations, to achieve an even quicker resolution. Both techniques are based on the application of these algorithms on graphs, which correspond to different representations of the adjacency matrix: I. *Maximum Matching algorithm in Bigraphs* [8], II. *Strongly Connected Components Detection Algorithm in digraphs* [11].

The objective of this work is the implementation of an improvement in the EDM, that we hope will provide greater efficiency in the determination of equations subsystems of easier resolution. This enhancement consists in including an ordering of the equations according to their nonlinearity degree (NLD) prior to the implementation of the Maximum Matching algorithm. Currently, the operation of EDM does not contemplate this possibility. Thus, the maximum matching obtained with this algorithm can produce a more appropriate organization of the adjacency matrix.

The following section details the operation of the above methods, the DM and EDM. Next, we contrast the structures that arise naturally in simulation and optimization models. Then, the proposed improvement is shown in detail and its inclusion in the EDM algorithm is outlined. Subsequently, we explain how we carried out the application of the enhanced algorithm on two case studies. Finally, the conclusions and research prospects are stated.

## 2 About DM and EDM

The DM and EDM partitioning methods for the adjacency matrix perform two steps to meet their objective: I. *Coarse decomposition*; II. *Fine decomposition*. Each of these stages works on a different representation of the adjacency matrix of the system, and performs alternative groupings on its equations and variables. In the original DM and EDM implementations, these stages are carried out as often as necessary, because forbidden blocks of equations and variables can arise after the application of the implemented graph algorithms. These constraints on block formation correspond to physical-chemical considerations on Instrumentation Design of Chemical Plants. In this work they are not taken into account, given that we want to evaluate only the algorithms performance in the formation of blocks, regardless of the specific area of model provenance and only taking into account the complexity of system variables and equations.

### 2.1 Coarse Decomposition

At this stage a representation of the adjacency matrix by a bipartite graph or bigraph is used. This type of representation is a pairing of the rows with the columns of a matrix, according to the existence of nonzero values in the corresponding cells, i.e. there is an edge joining a row with a column when the corresponding cell in the array has a 1. The rows of the matrix represent the

equations and the columns represent the variables in the system. In Fig. 1 this arrangement is shown.

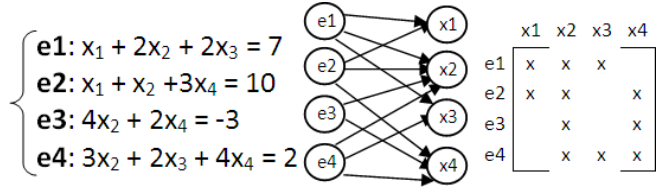


Fig. 1. System of equations, associated bigraph and adjacency matrix.

DM and EDM perform an algorithm to obtain a Maximum Matching [8] on the bigraph, identifying the major groups of variables and equations. These groups identify the subsets of variables, which may or may not be determined by solving the system. Fig. 2 describes an example showing the maximum matching and assignment sets, and table 1 expresses the detail of these sets.

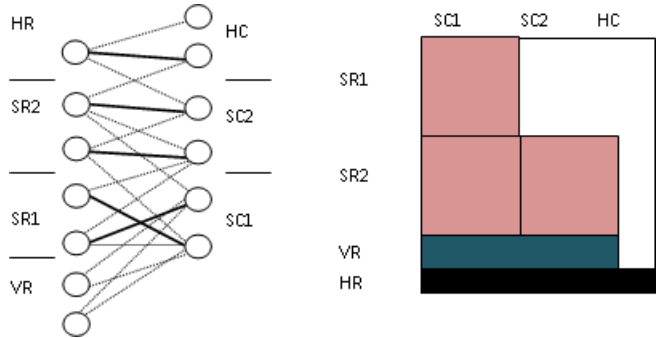


Fig. 2. Graphic example of a Maximum Matching and the equivalent partition in the permuted adjacency matrix.

At this stage we find the fundamental difference between the DM and EDM. Within the *Maximum Matching* algorithm of EDM, when selecting a node adjacent to another, there is a node list sorted in ascending order by the NLD of the adjacent nodes. In this way we take into account the degree of complexity of each variable and each equation for generating the system decomposition, so that the blocks obtained in the fine decomposition will lead us to a more efficient overall system solving process. With this improvement, the degree of nonlinearity of the blocks obtained by the EDM manages to be lower than that of the blocks of the DM. This is evidenced by the number of linear blocks obtained with the DM versus the quantity obtained by the EDM, which will surely be greater.

**Table 1.** Assignment sets for row and column nodes of a matching.


Assignment sets	Features
SR1	First set of assigned equations
SR2	Second set of assigned equations
VR	Redundant equations
HR	Equations with indeterminate variables
SC1	First set of determinate variables
SC2	Second set of determinate variables
HC	Indeterminate variables

Increased efficiency by means of this improvement can be justified considering that solving a system of nonlinear equations has a much higher computational cost than solving a linear one.

## 2.2 Fine Decomposition

Once the variable assignment sets were obtained, the next step is to determine the blocks within the sets SR1-SC1 and SR2-SC2 that will determine the final equations subsystems for the resulting observable variables. To carry out this decomposition, a representation of the sets of rows and columns mentioned by directed graphs or digraphs is used. The *Strongly Connected Components Detection* algorithm [11] is applied to the obtained digraphs, which yields the final blocks that determine subsystems of equations assigned to groups of related variables.

A strong component of a digraph is a subset of nodes, with the key feature that any node can be reached from another node within the set, moving through the edges of the digraph. The application of this algorithm in a graph is shown in Fig. 3.

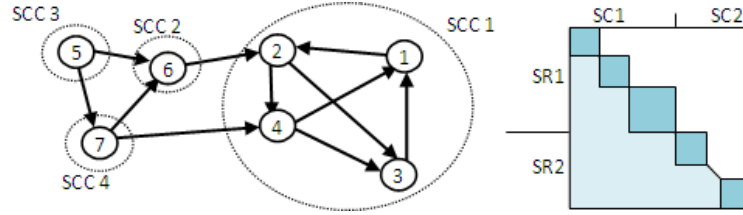

**Fig. 3.** At the left an example of the strongly connected components detection in a digraph. At the right the structure of a lower triangular block matrix corresponding to the subset SR1-SR2, SC1-SC2 of DM and EDM.


Each strong component determined by this algorithm identifies a subsystem of equations, which can be solved as long as all the above steps were solved.

The resolution of each subsystem depends only on the latter, since the new arrangement results in a matrix in *Lower Block Triangular Form* (see Fig. 3); Therefore, the only variables not yet determined will correspond to the columns in this block and the subsequent ones to the right. The structure resulting from the application of this algorithm to a digraph adjacency matrix is depicted in Fig. 3.

The lower triangular block structure is achieved by applying the permutations in the adjacency matrix, indicated by the algorithms performed to the graph representations. Once this partitioning is done, the system of equations can be easily solved in different stages.

### 2.3 Simple application example

In this section we show the application of the DM and EDM algorithms to a system of equations. It is shown in Fig. 4. In its associated model, following the given example, it could have been decided that variables  $x_6$ ,  $x_7$  and  $x_8$  are preset with 10, 6 and 8, respectively.

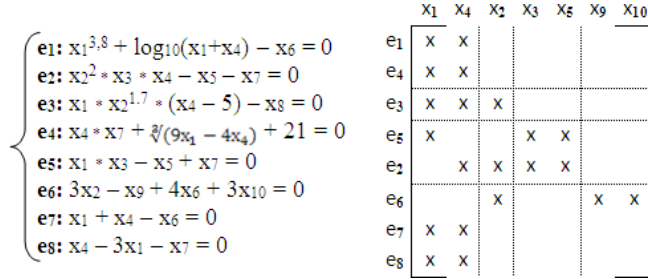


**Fig. 4.** At the left a system of equations with linear and nonlinear equations. At the right the associated permuted adjacency matrix, obtained by the application of DM and EDM.

The equations that make up this system have different NLD. We can see that equations 1 to 5 contain nonlinear terms, which complicates the resolution of the complete system if it is solved as a unit. By implementing the EDM to partition the main matrix, we obtain the equivalent system partition shown in the adjacency matrix of Fig. 4. If we solve the system step by step according to the blocks identified in Fig. 4, the resolution would involve sequentially processing a nonlinear system of 2 equations for  $x_1$  and  $x_4$ , a nonlinear system of an equation for the variable  $x_2$ , and a nonlinear system of 2 equations for  $x_3$  and  $x_5$ . After solving the subsystems, we can obtain the values of these variables.

### 3 Convenient partitioning for PSE models

Efficiently solving systems of equations is a topic of interest in various areas of Scientific Computing, because there is a great diversity of models defined by a wide range of systems of varying complexity. The state of the art in numerical optimization shows a revolution in the techniques used to solve a growing range of application problems. There are algorithms with a large theoretical support that make them strong and reliable for its implementation. However, in practice, it is well known that in process-system engineering (PSE) models tend to increase their size and complexity when the formulations evolve towards more realistic designs. Thus, currently it is a great challenge to develop knowledge and refinement of existing software on the design of new algorithms that support higher levels of complexity with minimal computational costs. Therefore, an interesting goal is to develop a module to solve large mixed systems, where a prior matrix reordering is required. Regarding execution times, this tool will efficiently solve complex simulation and optimization problems.

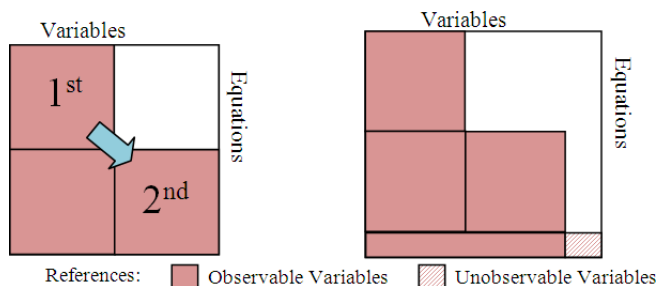

**Fig. 5.** At the left a decomposition for simulation. At the right a decomposition for optimization.

The EDM obtains a decomposition of the subsystems and an order of precedence for the efficient system resolution. It gives excellent results when applied to solving real process monitoring problems. This technique seems to be extremely efficient in terms of execution times, as well as applicable on any kind of matrices, regardless of their structural pattern, increasing its effectiveness as the problems grow in size and complexity. The decomposition technique carried out by the EDM provides a solid basis for developing a methodology that solves large systems of equations.

The EDM identifies two different types of variables, depending on the feasibility of calculating them: I. Observable: unmeasured variables that can be obtained from the measured variables by using the model equations. II. Unobservable: unmeasured variables that cannot be calculated from the measured variables or from the model equations. Translating this classification from the observability analysis towards the solving of mathematical models, we can say that the observable variables are those calculated from the square blocks detected by

the algorithm (simulation), while the unobservable variables are in rectangular blocks with more variables than equations (optimization) (see Fig. 5).

## 4 EDM Algorithm enhancement

The outstanding advantage of EDM with respect to DM is the determination of the NLD of system variables and equations in order to obtain less complex blocks of observable model variables. In its implementation, NLD is included in the maximum matching algorithm, so that when selecting a node to be paired, an adjacent node with the lowest NLD is selected among the feasible ones. The purpose of this paper is to add a step before the determination of the first matching, that conducts a preliminary ascending order of the equations by NLD.

The algorithm to obtain a maximum matching used in the above methods including the proposed improvement can be described with the following steps:

1. Sort the adjacent nodes to each node in ascending order by NLD.
2. (Enhancement) Sort the equations set by NLD in ascending order.
3. Build an initial matching with the ordered lists of equations and adjacent nodes.
4. Find augmenting paths until there are no more paths.

With the first step we ensure that every time we perform a matching, we do this with the least possible NLD in the adjacent node. This principle has already been included in the EDM. The second step is the improvement incorporated in this work. It consists in sorting the system equations based on the NLD of each one. Thus, we also ensure a better sorting because at the time of assembling an initial matching, the first equations that are matched are those with a lower NLD. The first matching obtained is called “*Cheap Assignment*” [9], and is the basis for the augmenting paths finding process. This process aims at finding an unexplored edge towards an unpaired node that may increase the total amount of nodes in the matching.

### 4.1 The C language: High Efficiency on Sorting

When implementing this improvement, an important issue to consider was the problem of sorting elements on an array. It is known that this is one of the most expensive resource-consuming tasks in a computing system. All the methods mentioned in this paper were implemented in C. To avoid a large impact on the overall efficiency of the algorithm, a native function of the C language was used in order to avoid compromising the overall program performance. This function performs data sorting by using the *quicksort* algorithm [7], which has proven to have very high efficiency. Programs compiled in this language are also very efficient compared to other platforms.

## 5 Applications

To verify the performance of the new proposed algorithm, we applied it to two systems of equations with different characteristics: the first is smaller, and is described in Fig. 4, while the second is larger, and comes from a model of a classical distillation column of a chemical plant.

### 5.1 Application to a small system of equations

The system of equations shown in Fig. 4 exhibits a particular characteristic. Although the equations  $e_1$  and  $e_4$ , taking into account the proposed values for the variables  $x_6$ ,  $x_7$  and  $x_8$ , form a subsystem of equations that can give us the values for  $x_1$  and  $x_4$ , we see the same situation in the equations  $e_7$  and  $e_8$ . Since the last two equations above are linear, solving the subsystem that they form is computationally much less expensive than solving the nonlinear one composed of  $e_1$  and  $e_4$ . This issue is not taken into account by the EDM, because of the way it manages the NLD in the equations. When applying this method with the proposed improvement on the arrangement of equations, the result is seen in Fig. 6. Thus, it would be necessary first to solve a linear system, instead of a nonlinear one, in order to determine  $x_1$  and  $x_4$  by using equations  $e_7$  and  $e_8$ .

	$x_1$	$x_4$	$x_2$	$x_3$	$x_5$	$x_9$	$x_{10}$
$e_7$	x	x					
$e_8$	x	x					
$e_3$	x	x	x				
$e_5$	x			x	x		
$e_2$		x	x	x	x		
$e_6$			x			x	x
$e_1$	x	x					
$e_4$	x	x					

**Fig. 6.** Partitioning achieved by applying Enhanced EDM on the example.

This result is an example where an equivalent partition of a system of equations is found, and the resolution may be carried out in a less complex way.

### 5.2 Application to a system of equations from an equipment model

For this application example, we use a system of equations from the model of a classical distillation column [5]. This system consists of 102 equations and 85 variables. The three algorithms (DM, EDM and EDM improved) reach a partition with a block of 44 subsystems of equations, whose solution allows determining the value of 63 variables. This means that all three methods identify 63 observable variables in the model system. The most important differences are derived from the linear block number obtained by each method. This analysis



is performed only for the EDM and the EDM improved, since the basic MD makes no distinction for NLD. The amounts for each type of assignment block are shown in table 2.

**Table 2.** EDM and Enhanced EDM results for the distillation column example.

	<b>EDM</b>	<b>Enhanced EDM</b>
Linear blocks of size 1	23	27
Linear blocks of size 3	2	3
<b>Total of linear blocks</b>	<b>25</b>	<b>30</b>
<b>Observable variables</b>	<b>29</b>	<b>36</b>
Nonlinear blocks of size 1	15	11
Nonlinear blocks of size 4	3	2
Nonlinear blocks of size 7	1	0
Nonlinear blocks of size 8	0	1
<b>Total of nonlinear blocks</b>	<b>19</b>	<b>14</b>
<b>Observable variables</b>	<b>34</b>	<b>27</b>
<b>Total of blocks</b>	<b>44</b>	<b>44</b>
<b>Total of observable variables</b>	<b>63</b>	<b>63</b>

From the detail of linear and nonlinear blocks obtained by each algorithm, we can see that with the enhanced EDM more linear blocks are found than with the basic EDM, for this example. EDM identifies 25 linear blocks, while the improved EDM finds 30 and also identifies an additional linear block of size 3. If we calculate the number of variables that are determined in either algorithm based on linear block sizes and quantities, we have that EDM determines 29 variables by linear systems, while the enhanced EDM achieves 36 variables. Following the same reasoning, considering that nonlinear blocks are much more complex to solve, the improved EDM also decreases the total amount of nonlinear blocks from 19 to 14, and the number of nonlinear blocks of size 4 from 3 to 2.

## 6 Conclusions

We have described the operation of three methods for partitioning adjacency matrices associated with systems of equations from various mathematical models. These methods are based on graph theory to optimize the distribution of equations and variables, so as to facilitate the resolution of such systems. The EDM is based on the DM, and adds the feature of special treatment of variables and equations according to their level of complexity, as measured by NLD. With this method adaptation to the inherent complexity of the system, remarkable progress in optimizing its resolution is made, giving priority to solving simpler subsystems of equations.

In this work for two varied case-studies we have determined that the complexity of the subsystems generated with the proposed improvement to the EDM

algorithm significantly decreases. In the first case a variant in the organization of the adjacency matrix is identified, which consists in the replacement of a subsystem of nonlinear equations by a linear one, with the reduction of processing requirements that it generates. In the second case, we have analyzed the application of the method to a matrix of a system that is associated with an engineering model of considerable size. The results obtained by the new method overcome those of its predecessor since, among other features, it both increases the amount of linear blocks and at the same time reduces the quantity of nonlinear concomitant blocks. This behavior is indicative of a substantial improvement that the proposed EDM amendment actually offers.

## References

1. S. Abbasbandy. Improving newtonraphson method for nonlinear equations by modified adomian decomposition method. *Applied Mathematics and Computation*, 145(23):887 – 893, 2003.
2. T. B. Benjamin, J. L. Bona, and J. J. Mahony. Model equations for long waves in nonlinear dispersive systems. *Philosophical Transactions of the Royal Society of London. Series A, Mathematical and Physical Sciences*, 272(1220):47–78, 1972.
3. B. E. Borders. Systems of equations in forest stand modeling. *Forest Science*, 35(2):548–556, 1989.
4. A. M. Bruckstein, D. L. Donoho, and M. Elad. From sparse solutions of systems of equations to sparse modeling of signals and images. *SIAM Rev.*, 51(1):3481, 2009.
5. A. Domancich. *Nuevas Estrategias de Particionamiento para Matrices Ralas Generales: Aplicaciones Matemáticas y Tecnológicas*, Tesis Doctoral en Ingeniería Química, Directores: Brignole N.B., Hoch P.A. PhD thesis, UNS, Bahía Blanca, 2009.
6. L. Grigori, P.-Y. David, J. W. Demmel, and S. Peyronnet. Brief announcement: Lower bounds on communication for sparse cholesky factorization of a model problem. In *Proceedings of the 22nd ACM symposium on Parallelism in algorithms and architectures*, SPAA '10, pages 79–81, New York, NY, USA, 2010. ACM.
7. C. A. R. Hoare. Quicksort. *The Computer Journal*, 5(1):10–16, 1962.
8. J. Hopcroft and R. Karp. An  $n^{5/2}$  algorithm for maximum matchings in bipartite graphs. *SIAM Journal on Computing*, 2(4):225–231, 1973.
9. I. Ponzoni. "Aplicación de Teoría de Grafos al Desarrollo de Algoritmos para Clasificación de Variables", Tesis Doctoral en Ciencias de la Computación, Directores: Simari G., Brignole N.B. PhD thesis, UNS, Bahía Blanca, 2001.
10. D. A. Spielman and S.-H. Teng. Nearly-linear time algorithms for graph partitioning, graph sparsification, and solving linear systems. In *Proceedings of the thirty-sixth annual ACM symposium on Theory of computing*, STOC '04, pages 81–90, New York, NY, USA, 2004. ACM.
11. R. Tarjan. Depth-first search and linear graph algorithms. *SIAM J. Comput.*, (1):146–160, 1972.
12. J. Wright, Y. Ma, J. Mairal, G. Sapiro, T. Huang, and S. Yan. Sparse representation for computer vision and pattern recognition. *Proceedings of the IEEE*, 98(6):1031–1044, june 2010.
13. T. J. Ypma. Historical development of the newton-raphson method. *SIAM Review*, 37(4):pp. 531–551, 1995.