

# Human/Robot Communication through the application of bio-electrical signal interfaces.

Jorge Ierache<sup>1,2</sup>, Gustavo Pereira<sup>1</sup>, Iris Sattolo<sup>1</sup>, Juan Irribaren<sup>1</sup>, Nicolás Suiffet<sup>1</sup>.

Instituto de Sistemas Inteligentes y Enseñanza Experimental de la Robótica FICCTE<sup>1</sup>  
Information Advanced Systems Laboratory. Engineering School. University of Buenos Aires<sup>2</sup>  
Universidad de Morón, Cabildo 134, (B1708JPD) Morón, Buenos Aires, Argentina  
54 11 5627 2000 int 189  
jierache@unimoron.edu.ar

**Abstract.** This article shows the experiences carried out in the context of human/robot communication, on the basis of brain bio-electrical signals, with the application of the Brain-Machine Interface from NIA. There are available technologies and interfaces which have facilitated the reading of the user's brain bio-electrical signals and their association to explicit commands that have allowed the control of biped and mobile robots (NXT-Lego) through the adaptation of communication devices. Our work presents an engineering solution, with the application of technological bases, the development of communication framework local and remote control, the description of experiments and the discussion of the results achieved in field tests. Finally, the Brain-Machine Interface (BMI) from Emotiv is presented.

**Key words:** Robots, Brain Machine Interface, Bio-Electrical Signal, Human Machine Interfaces.

## 1 Introduction

The application of bio-electrical signals for the control of systems, robots, applications, games and devices in general presents an original approach as it opens up new possibilities for the interaction of human beings and computers in a new dimension, where the electrical biopotentials registered in the user are specifically exploited; these biopotentials include the EMG (electromyogram), the EEG (electroencephalogram) and the EOG (electro-oculogram), which are bio-electrical signals generated by activity patterns in the user's muscles, brain and eyes. The idea of moving robots or facilitating the application of devices for the physically disabled people by controlling them only through the brain activity, with no use of manual controls, has fascinated researchers. In this regard, several works have been presented; the first ones resorted to the implantation of intracranial electrodes in the motor cortex of primates [1], [2]. Non-invasive works for humans resorted to EEG

signals, applied to mental command exercises, such as moving the computer cursor[3], [4] based on the use of Brain-Machine Interface (BMI). Millan et. al [5] show how two people are able to move a robot by using a simple electroencephalogram on the basis of recognizing three mental states, which are associated to robot commands. The works presented by Saulnier et al. [6] focused on controlling robot speed and further inferring the user's stress level, thus influencing on the social behavior of domestic robots, in this case of a robotic vacuum cleaner. Millan et al's seminal work [5] uses the EEG as a unique bio-electrical signal, on the basis of the work of two people to support robot navigation; in contrast to this, our work presents the preliminary result by applying a low-cost BMI, used in secondary works like that by Saulnier et al[6] that includes bio-electrical signals corresponding to the electroencephalogram, the electro-oculogram and the electromyogram. Unlike Saulnier et al's work, in which speed control is implemented on the basis of the electromyogram and the user's stress level is inferred on the basis of the electroencephalogram, our work focuses on the execution of a navigation pattern task by a robot, by comparing the manual control and brain control operating times during the beginning of a user's learning curve, with results that show that the brain control requires in general terms twice as long as the manual control for the execution of the same navigation pattern. However, in the context described our work introduces an improvement in the brain control times slightly exceeding the manual control in the execution tests of the same navigation pattern, which we call brain control with auto-focus. In our research work the V1 Robosapiens Biped robot from the Woo Wee Robotics family [8] was used for the preliminary tests and as main robot a simple mobile one on the basis of an NXT Lego was assembled [9]. In the second part of this work it is presented the problem to be solved in the context of the use of a BMI for the control of robot behaviors, the difficulty in the process of selection of robot behaviors. In the third part it is proposed the solution, with a description of the BMI used, the brain control of each robot behavior, and the features of the integration framework. Finally in the fourth part the comparative results obtained from the tests carried out with manual control, brain control and brain control with auto-focus are discussed, being the latter presented as a solution for the selection of robot behavior through brain-actuated control.

## 2 Problem

Our initial objective was to explore an engineering solution that allows us to achieve a primary integration of a BMI and a robot so as to be used by a user who does not need to have previous experience in meditation techniques or specific training in mental concentration. For the brain control of a robot, two commands were set out: one enabling the control of behavior **selection** and another one making it possible the **execution** of robot behavior on the basis of its own controllers (for example moving forward in the case of the biped robot or turn right in the case of the mobile robot), with no major difficulties when associating the **execution** to a muscular bio-electrical signal stimulus. Nevertheless, the **selection** of a behavior (in our context those behaviors corresponding to the menu of the family of robot behavior) through brain

control, on the basis of bio-electrical signals coming from the electroencephalogram, **was not practical for the user**, due to the difficulty in controlling the menu of behavior selection **in a stable way** .

### **3 Solution description**

An experimental architecture having two communication models is established; the first model, and main study subject, is called high-level communication model: “user-computer”; this model was implemented with a low-cost OCZ NIA BMI[10] and EMOTIV BMI [X1]. The BMI-NIA is used in an experimental way in videogames and makes it possible the association of brain signal patterns with the computer keyboard and computer mouse. Taking this into account, it was determined a simple profile for robot operation that associates and characterizes in the first place the control for the execution of the mental command on the basis of the detection of muscle signals, in our case through a slight eyelid movement, and in the second place the selection of the robot high-level commands, working in this case on the basis of Alpha brainwaves. This type of bioelectrical signals did not guarantee the user an adequate control in the displacements through the menu of command selection of the robot’s control framework. For this reason it was implemented the option of auto-focus application for brain control mode in the framework in order to improve the user’s management in the selection process. The second communication model, called low-level communication model: “computer-robot”, was implemented in the case of the V1 Robosapiens through an IR Tower [11], and in the case of the NXT mobile robot its Bluetooth communication capabilities were exploited. The communication with robots done via IR was based on the results obtained in the capture and reproduction of commands controlled from a computer [12].

#### **3.1 Brain-Machine Interface - NIA**

The Neural Impulse Actuator (NIA) was used as a brain-machine interface / BMI [10]. It is composed of a driver control unit (figure 1) and a headband with three diamond-shaped sensors, which is put on the user’s forehead (figure 2), manufactured using carbon fiber nanotechnology. The driver control unit is connected to the computer and fed via a USB 2.0; the software that comes with the NIA allows the calibration, training and definition of the control profiles that make up the applications. The preparation of the profile to control the robot makes it necessary to think about the intuition of the robot behavior that is intended to be controlled. BMI capabilities are different from those of a keyboard, so control strategies are to be adjusted consequently to take advantage of the more limited reaction times and the higher level of immersion in robot behavior.




**Fig. 1.** BMI-NIA



**Fig. 2.** Headband – NIA

The BMI-NIA has an application having a control and configuration panel to allow auto-calibration of the recorded biosignals (Fig.3) through its components: the electro-oculogram that detects eye glancing (eye movement activity), the electroencephalogram that records Alpha brain waves (9-13 Hz, present in the following situations: wakefulness, normal alertness and consciousness) and the beta waves (14-30 Hz, present in the situation of being relaxed, calm, lucid, or not thinking), and finally through the electromyogram that detects muscle amplitude. Moreover, the application has some tools for the creation and editing of profiles that allow the association of biosignals with keyboard commands.

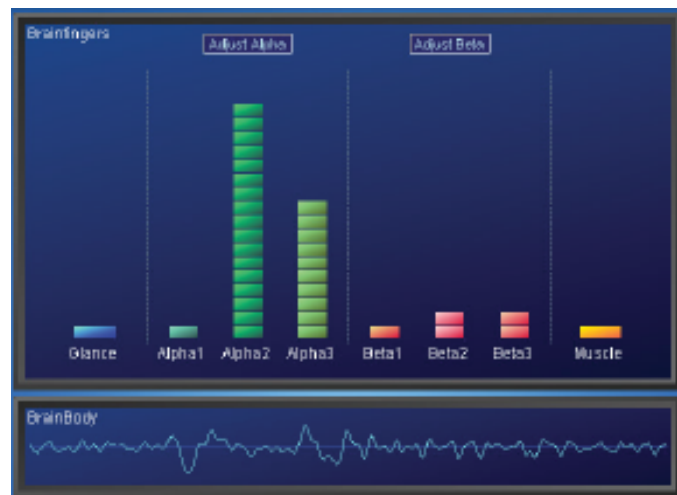

**Fig. 3.** Biosignal panel

For the creation of profiles in the BMI-NIA, switch events are firstly considered; they are thought to select actions that require precise timing for these switch events, like for example jumping in an action game, turning right in the case of a mobile robot or taking a step to the right in the case of a biped robot. The switch events can further be assigned a single data transfer, single mouse click or keystroke or a hold function. In the latter case, the action bound to the key will continue as long as the switch event remains active. The BMI-NIA allows us to bind the profile up to three different switch events. The BMI-NIA considers as a second step for the creation of a profile, the creation of up to four joysticks (horizontal, vertical, parallel). Each vertical joystick allows the definition of up to four different zones, for each zone up to

three switch events may be stated; moreover, several modalities may be assigned to each zone (on/off, hold the key for a certain time, a single click, delay the activation for a defined time, repeat at a defined interval, repeat and hold, etc.) Every biosignal can be used in one or more parallel joysticks that use the same input biosignal; the result is equal to pressing two or three keys on the keyboard simultaneously. Four zones, two left ones and two right ones, can also be assigned to the horizontal joystick; it is applied with the “glance” biosignal coming from the electro-oculogram. This signal follows the lateral eye movements and could be used so that the robot may turn right or left. The same as in the case of the vertical joystick, up to three switch events and modes are defined for each zone. Each joystick can be separately adjusted with respect to the level, amplification and smoothing of biosignals.

### 3.2 Brain-actuated control of robot’s behavior- NIA

The communication of robot behaviors is implemented in two communication models (Fig.4), a high-level one between the BMI-NIA and the framework, and a low-level one between the latter, by means of the communication transmission device, and the robot. The high level communication model, developed for the integration of the mental commands with the behaviors associated to the mobility of the Robosapiens V1 and the NXT respectively, functions between the BMI-NIA and the framework, where the selection and execution of motion behaviors for the biped robot and the mobile robot take place, by means of the mental commands captured by the BMI-NIA according to the profile for the robot control. The profile associates and characterizes firstly the control for the execution of mental commands on the basis of a switch event bound, in our case, to the “spacebar” key in single mode, being its activation controlled by muscle biosignal, with a gentle eyelid movement. Secondly, for the selection of the robot’s high-level commands it was defined in the profile a vertical joystick (1°), which is activated on the basis of the Alpha 1 waves, being the event bound to the “F” key, in zone ZI. To improve the user’s control in the displacement by means of the **selection** menu, the framework enables the activation of auto-focus. The auto focus is BMI-independent; it is used in our framework to make a sequence of the commands according to the test pattern. Although the auto focus functionality assists the user, it does not replace the event of the command mental **selection**; it only makes a controlled sequence, unlike the brain control mode (without the use of the auto focus) that does not control command sequencing, thus requiring a bigger effort on the part of the user.

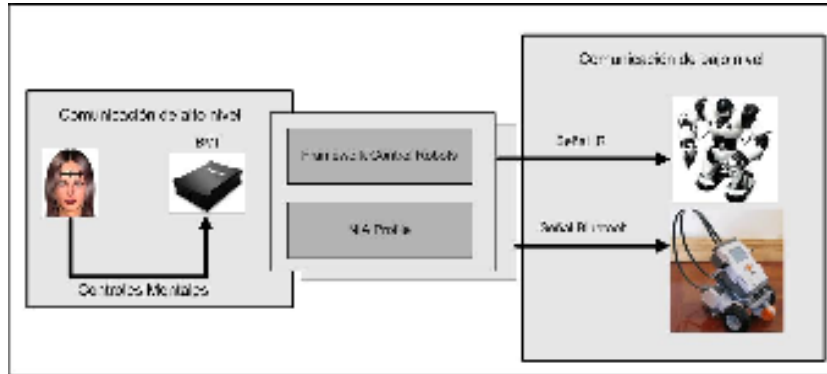


Fig. 4. Robot- BMI-NIA Integration

The framework configuration (Fig.5) for the fulfillment of the tests in the 'brain control with auto-focus' mode adopted the following command path: left-stop, forward-stop, right-stop. The execution of the 'forward' command was set to 2 seconds and the turns to 50 seconds. For the brain control (without auto-focus) tests said function was deactivated and it was used the same framework as in the manual control, with the same time parameters for the execution of forward and turn motions.


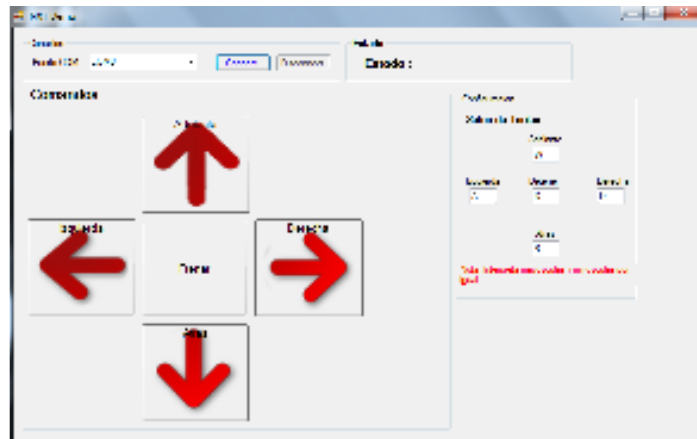


Fig. 5. Mobile Robot Framework

#### 4 Result Discussion- BMI-NIA

Even though all the features of the BMI-NIA have not been mastered so far, we can comment that whenever used it is to be calibrated; although it was found out that calibration has not always been necessary, it is better to calibrate it before each test session period. On several occasions, the desired results were not achieved,

particularly in the first attempts due partly to the equipment sensitivity to electromagnetic fields, and it was also found out that the user could exert some influence when touching the BMI-NIA. Throughout the initial trainings, the users became tired and needed some rest after approximately 30 minutes. At the beginning, the user makes muscular motion in an exaggerated way, but with practice and the improvements on profile calibration, the muscle movements are minimized. The tests performed with the biped robot were oriented to the free execution of mental commands and were the basis for the preparation of more complex tests with the mobile robot. One of the functional tests of free execution of the biped robot was video-documented [13]. The mobile robot tests were carried out in an experimentation area (2.00 meters x 1.50 meters) on which four check-points (Cp), distributed according to a pattern (Fig.6) were marked. The first test case was that of the manual control (MC) of the robot controlled by the user; for this case three training sessions and three test sessions were performed. The second test case was that of the brain control (BC); nine previous training sessions and three test sessions were carried out. The third test case was performed in order to check the work proposal, regarding the application of brain control with auto-focus (BC-AF) in the command to be executed, according to the navigation pattern; for this mode six training sessions and three test sessions were carried out.

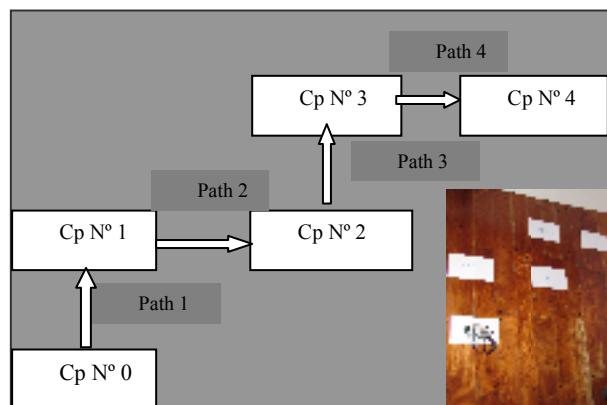

**Fig. 6.** Mobile Experimentation Pattern

For each test session, the partial times of each path defined between each check-point (Cp) –as detailed in table 1 “Mobile robot experimentation outcomes”- were obtained. The preliminary outcomes indicated that the combination of brain control with auto-focus (BC-AF) was quicker than the manual control solution; however, in general terms the Brain control (BC) solution was slower than the manual control (MC) solution. Table 1 shows the comparative average results obtained in the three test sessions corresponding to each control case (manual, brain, brain with auto-focus,


respectively): (a) the time per path between each check point, (b) the total time to perform the pattern, (c) the time difference between manual control and brain control, (d) the time difference between manual control and brain control with auto-focus, (e) final percentages between manual control and brain control, final percentages between manual control and brain control with auto-focus. The second section of Table 1 shows the cumulative times between paths and the total time. Finally, to summarize we could state that the brain control with auto-focus was 11.32 % better than the manual control, though the manual control was 111 % better than the brain control (without auto-focus).

**Table 1.** Mobile robot experimentation outcomes


Type of Control	Manual	Brain	Brain Control
<b>Average time between Path</b>	<b>Control (MC)</b>	<b>Control (BC)</b>	<b>with Auto focus (AF)</b>
Path 1	00:02,85	00:02,19	00:01,84
Path 2	00:04,92	00:08,09	00:04,43
Path 3	00:04,91	00:13,60	00:04,50
Path 4	00:04,44	00:11,47	00:04,43
Total Time	00:17,13	00:36,16	00:15,19
Delta Time MC-BC		19,03	
Delta Time MC-BC + AF			1,94
% MC-BC		111%	
% MC-BC+AF			11,32%
<b>Cumulative Time</b>	<b>Manual</b>	<b>BC</b>	<b>BC-AF</b>
Path 1	00:02,85	00:02,19	00:01,84
Path 2	00:07,78	00:11,09	00:06,27
Path 3	00:12,69	00:24,69	00:10,76
Path 4	00:17,13	00:36,16	00:15,19
Total Time	00:17,13	00:36,16	00:15,19

Fig. 7 shows the comparative distribution of average times of the test sessions for each path: with manual control, brain control and brain control with auto-focus, respectively. Finally Fig.8 shows the total time for each path, for each test according to the control type (manual control, brain control and brain control with auto-focus, respectively). To complete the navigation pattern, the second brain control test (test 2 BC) was the one which took longer (45.47 seconds ) and the third test of brain control with auto-focus (test 3 BC-AF) was the one that took less time (13.93 seconds) to complete the same navigation pattern. Some parts of the mentioned tests were video-documented: brain control [14], brain control with auto-focus [15]



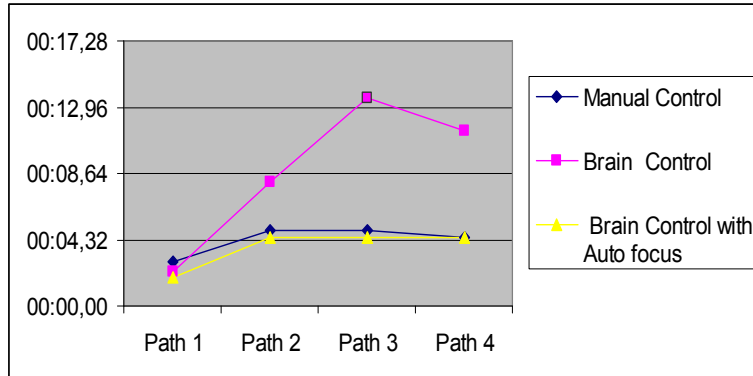


**Fig. 7.** Average time between paths

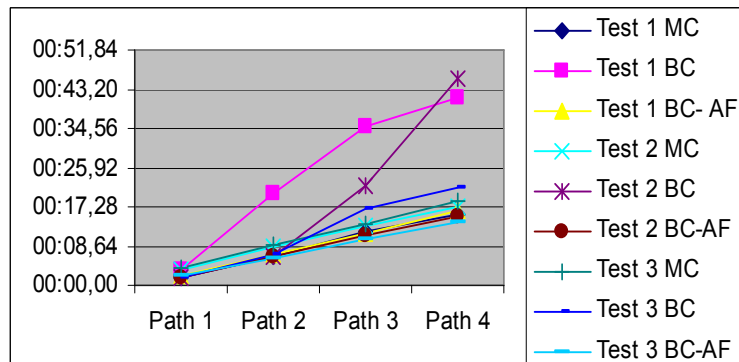

**Fig. 8.** Total time for each test

## 5. BMI-NIA Remote Control

The remote control was implemented through a web service which receives the remote client commands and transfers them via HTTP. In doing so, it uses the SOAP communication protocol connecting to one layer that controls the Bluetooth connection of the Lego NXT and its movement primitives. This layer was implemented through AForce libraries [16] which facilitate the control of an NXT robot together with the Microsoft .NET. Fig. 9 shows the conceptual architecture implemented [17] to reach the integration of the BMI of the user that controls a robot remotely.

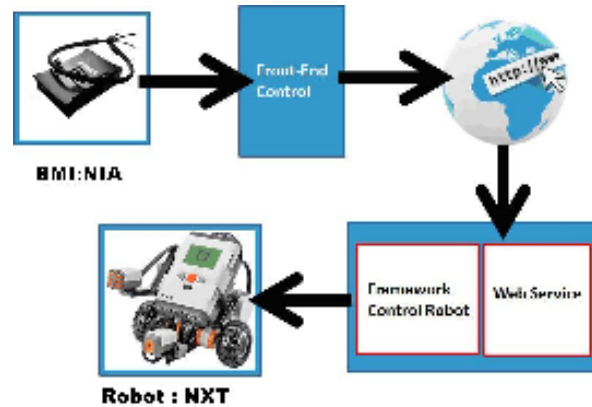

**Fig.9.** Integration of BMI-NIA and remotely-located Robot


So to accomplish this, a web service architecture has been developed. It receives all the commands of connection and movement primitives and sends them to an NXT robot through a Bluetooth interface that runs from a remote computer with Bluetooth. The web service in the remote server receives the client's commands and translates them into the instructions for the NXT. The implementation of a web service was chosen, so as to have a secure connection with a well-known communication protocol, allowing the client to be developed in several programming languages for multiple platforms. For the web service testing, a frontend was incorporated to see the threads received and executed by the NXT and the connection data. Initially, the display of the robot's movements in the remote site was done through a standard videoconferencing client.

## 6 Emotiv Brain-Machine Interface

The first experiences with the Emotiv BMI [18] [19], [20] have been carried out for the open control of an NXT robot by developing a framework that allows basic forward and backward movements associated to EEG signs (based on the concept of moving away or attracting a cube), and left and right turns associated to myogram signals through the left or right eye blink, respectively. The Emotiv (Fig. 10) contact level of the electrodes, the movement of the gyroscope, the intensity of the wireless signal and the charge of the battery can be monitored from both the API and the software (Fig.11) included in the development kit.



**Fig.10** . Emotiv BMI

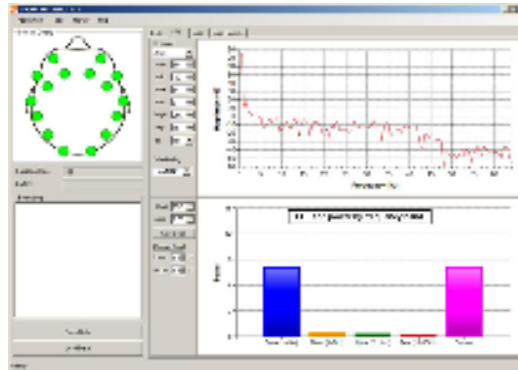

**Fig.11** . Emotiv configuration software

## 7 Conclusions and Future Lines of Research

Due to the experience and the outcomes obtained in the preliminary tests of human-robot integration through brain-actuated control, we could enter a new dimension of communication. As a result of the tests performed in a real environment with physical limitations, for example the slight floor undulation, the final outcome was that the brain control with auto-focus mode slightly exceeded the manual control. Although the manual control exceeded the brain control in terms of time for the execution of the navigation pattern, this is to be considered in a preliminary framework within the beginning of the user's learning curve with BMI memory. In conclusion, this experience allows us to appreciate the wide potential of applications, especially those oriented to physically disabled people, as well as human interaction in a direct way with context-centered applications, and the future potential of human-robot collaboration among other possible fields. Our future research lines will focus on the development of an integrate framework for robots and the study of new BMIs in the quest to control effectively IR controlled devices such as Air Conditioned systems, TVs, etc allowing handicap persons to interact and control devices locally and placed in remote sites.

## References

1. J. Wessberg, C. R. Stambaugh, J. D. Kralik, P. D. Beck, M. Laubach, J. K. Chapin, J. Kim, S. J. Biggs, M. A.Srinivassan, and M. A. L. Nicolelis, "Real-time prediction of hand trajectory by ensembles of cortical neurons in primates," *Nature*, vol. 408, pp. 361–365, 2000.
2. M. A. L. Nicolelis, "Brain-machine interfaces to restore motor function and probe neural circuits," *Nature Rev.Neurosci.*, vol. 4, pp. 417–422, 2003.

3. R. Wolpaw, D. J. McFarland, and T. M. Vaughan, "Brain-computer interface research at the Wadsworth center," IEEE Trans. Rehab. Eng., vol. 8, pp. 222–226, 2000.
4. J. del R Millán, "Brain-computer interfaces," in Handbook of Brain Theory and Neural Networks, 2nd ed, M.A. Arbib, Ed. Cambridge, MA: MIT Press, 2002.
5. José Millán, Frédéric Renkensb, Josep Mouriñoc, and Wulfram Gerstnerb. Non-Invasive Brain-Actuated Control of a Mobile Robot by Human EEG. IEEE Trans. on Biomedical Engineering, Vol 51, June 2004.
6. Paul Saulnier, Ehud Sharlin, and Saul Greenberg. Using Bio-electrical Signals to Influence the Social Behaviours of Domesticated Robots. HRI'09, March 11–13, 2009, La Jolla, California, USA. ACM 978-1-60558-404-1/09/03.
7. WowWeeRobotics.. <http://www.wowwee.com/en/products>
8. RS [http://www.wowwee.com/static/support/robosapien/manuals/Robosapien\\_Manual.pdf](http://www.wowwee.com/static/support/robosapien/manuals/Robosapien_Manual.pdf)
9. NXT <http://mindstorms.lego.com/eng/Overview/default.aspx> nxt
10. NIA [http://www.ocztechnology.com/products/ocz\\_peripherals/nia\\_neural\\_impulse\\_actuator](http://www.ocztechnology.com/products/ocz_peripherals/nia_neural_impulse_actuator). Retrieved December, 2008
11. USB-UIRT: <<http://www.usbuirt.com/>>
12. J. Ierache., M. Bruno, N. Mazza., M. Dittler "Robots y Juguetes Autónomos una Oportunidad en el Contexto de las Nuevas Tecnologías en Educación"., Proceedings VII Ibero-American Symposium on Software Engineering. Pag 371-379
13. Video Bípedo: <http://www.youtube.com/watch?v=-04JjfMcdfU>
14. Video Brain control: <http://www.youtube.com/watch?v=LhKV50jNgcY>
15. Video Brain control con auto foco: <http://www.youtube.com/watch?v=hD9CvQINxho>
16. <http://www.aforgenet.com>
17. Gustavo Pereira, Jorge Ierache, Juan D'Alotto, Iris Sattolo, Alejandro Guerrero, Juan Iribarren. Control vía Internet de un Robot ubicado en un sitio remoto aplicando una Interfase Cerebro-Máquina". XVII CACIC 2011, UNLP, ISBN 978-950-34-0756-117.
18. Jorge Ierache, Gustavo Pereira, Juan D'Alotto, Iris Sattolo, Alejandro Guerrero, Juan Iribarren, "Aplicación de Interfases lectoras de Bioseñales en un Contexto Remoto de un Robot". XIV Workshop de Investigadores en Ciencias de la Computación, Universidad Nacional de Misiones, Posadas, Argentina.. ISBN 978-950-766-082-5, paginas 812-816, abril 2012
19. <http://www.emotiv.com/>
20. [www.facebook.com/isierum](http://www.facebook.com/isierum) (Emotiv BMI demonstration at TEYET 2012)